




Volvo Buses. Driving quality of life

# VOLVO B8R LOW ENTRY 4X2

Euro 6

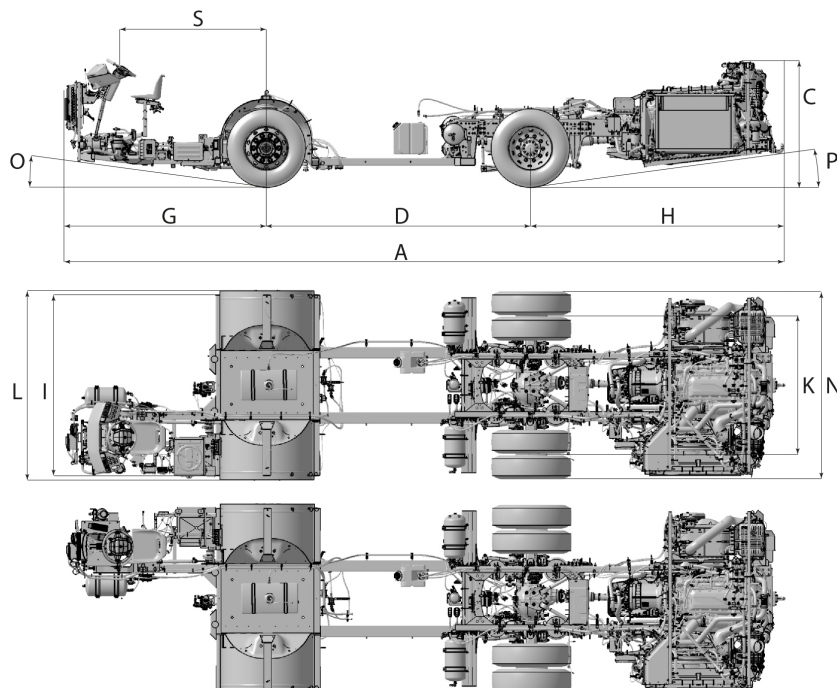

<b>Model</b>	<b>B8RLE, 4 x 2</b>
--------------	---------------------

<b>Overall dimensions</b>			
A	Overall chassis length	SWP1920 (mm)	10188-12688
		SWP2020 (mm)	10288-12788
B	Bogie (mm)		n/a
C	Frame height at rear structure (mm)*		1618
D	Transport wheelbase (mm)		3500
	Approved wheelbase (mm)		4500-7000
G	Front overhang (mm)	SWP1920 (mm)	2498
		SWP2020 (mm)	2598
H	Rear overhang (mm)		3190
	Optional rear overhang (mm)		2960
S	Steering wheel position (mm)	SWP1920 (mm)	1920
		SWP2020 (mm)	2020
I	Track, front (mm)*		2068
K	Track, rear (mm)*		1836
L	Overall width front wheels or housing*		2500
N	Overall width rear wheels (mm)*		2480
O	Approach angle (°) (SWP2020)		7.0
P	Departure angle (°)		7.5
	Departure angle for optional rear overhang (°)		8.1
*) Track width, overall width and frame height are measured with tyres: and steel rims			295/80R22.5" 8.25"x22.5"

# VOLVO B8R LOW ENTRY 4X2

Euro 6

<b>Model</b>	<b>B8RLE, 4 x 2</b>
--------------	---------------------

<b>Weights</b>	
Permitted front axle load (kg)	7500
Permitted drive axle load (kg)	12000
Bogie axle load (kg)	n/a
Permitted tag axle load (kg)	n/a
Permitted GVW (kg)	19500

<b>Engine</b>	<b>D8K</b>
Emission standard	Euro 6
Engine system	EGR, Common rail
Displacement (dm <sup>3</sup> )	7.7
Cylinders/arrangement	6/in-line
<b>Engine rating</b>	<b>D8K280</b>
Output (hp) (±0-4%)	280
Output ISO 1585 (kW) (±0-4%)	210
Torque ISO 1585 (Nm); at engine speed 950-1700 rpm	1071
<b>Engine rating</b>	<b>D8K320</b>
Output (hp) (±0-4%)	320
Output ISO 1585 (kW) (±0-4%)	240
Torque ISO 1585 (Nm); at engine speed 1050-1600 rpm	1224
<b>Engine rating</b>	<b>D8K350</b>
Output (hp) (±0-4%)	350
Output ISO 1585 (kW) (±0-4%)	263
Torque ISO 1585 (Nm); at engine speed 1200-1600 rpm	1428

<b>Fuel tanks</b>	
Diesel (L)	220, 300, 310, 360, 410
Transport (l)	50
AdBlue (L)	30, 48

<b>Transmission and axles</b>	
Gearboxes	Volvo I-Shift AT2412F ZF 6AP1200C (280 hp) ZF 6AP1400C (320 & 350 hp) Voith D864.6 (320 hp)
Front axle	Volvo RFS-L
Rear axle	Volvo RS1228C
Tag axle	n/a
Differential lock	Optional

<b>Suspension and steering</b>	
Air bellows, front	2
Air bellows, drive	4
Air bellows, tag	n/a
Kneeling	Optional
Max wheel angle	53° with 275/70R22.5 tyres
Power steering	Electric driven - hydraulic steering
Steering wheel position	LHD/RHD

# VOLVO B8R LOW ENTRY 4X2

Euro 6

## Important information

For variants concerning wheelbase, steering wheel diameter and permitted front axle load, see Type approval according to ECE R79 and ECE R13.

## Exhaust system

- One box muffler design
- Diesel Oxidation Catalyst (DOC)
- Diesel Particulate Filter (DPF)
- Selective Catalytic Reduction (SCR)
- Ammonia Slip Catalyst (ASC)
- Automatic regeneration of DPF without driver involvement under normal conditions
- On Board Diagnostic (OBD) for emissions, according to step C of emission regulations
- Engine certified hydrotreated vegetable oil (HVO, standard EN 15940)
- Biodiesel available for D8K320

## Cooling system

- Pivotal radiator to ease access for maintenance
- No coolant filter
- Coolant level warning in instrument cluster
- Higher allowed coolant temperature for better cooling performance and lower fuel consumption

## Tyres and rims

Steel or aluminium (only 8.25" x 22.5") rims available.

Rims	Tyres
7.50" x 22.5"	275/70 R22.5"
8.25" x 22.5"	295/80 R22.5"
Spare wheel	Optional

## Air and brake system

- Volvo disc brakes
- Electronic Stability Control (ESC)
- Electronic Braking System (EBS 5)
- Anti-lock Braking System (ABS)
- Acceleration Slip Regulation (ASR)
- Brake Blending
- Dual retarder control
- Drag torque control
- Hill Start Aid
- Brake Temperature Warning
- Poor brake performance warning
- Door Brake
- Brake Assistant
- Lining wear sensing and analysis
- Automatic calibration after brake pad change
- Compressed Air System, can easily be filled from external circuit

Cut-in pressure	9.5 bar
Cut-out pressure	10.8 bar

## Driver's station

Cluster and controls transit mounted. Also available with Volvo dashboard:

- Dashboard moves with the steering column in height and tilt
- Available in EBSF and VDV version with multistalk for wiper and direction indicator on left side of the steering wheel
- Instrument cluster:
  - speedometer
  - rev counter
  - 6.5" display
  - fuel gauge
  - coolant temperature
  - brakes
  - turbo and oil pressure
  - indicators
  - warning lamps
- Tachograph
- Data logging
- Volvo Alcolock
- External temperature meter
- Fuel economy meter
- Radio/phone switches in steering wheel
- Engine controls in engine compartment to enable engine operation from the rear of vehicle
- Volvo Dynamic Steering (VDS)
- Adaptive Cruise Control

# VOLVO

Volvo Bus Corporation  
volvobuses.com

# VOLVO B8R LOW ENTRY 4X2

Euro 6

---

## Electrical system

- Volvo I-Start system
  - dual battery system that separates batteries into two circuits
  - optimised start batteries to increase engine start capability
  - optimised consumer batteries for longer lifetime
- Automatic shut off of main switch at low voltage level
- Load balanced alternators
- Regenerative charge control to increase fuel efficiency

### Number of batteries

Start batteries	2 x 12 V
Consumer batteries	2 x 12 V

### Battery capacity

Consumer batteries	105 Ah
--------------------	--------

**VOLVO**

Volvo Bus Corporation  
volvobuses.com